


The SDT-1 Operation Manual

Key functions

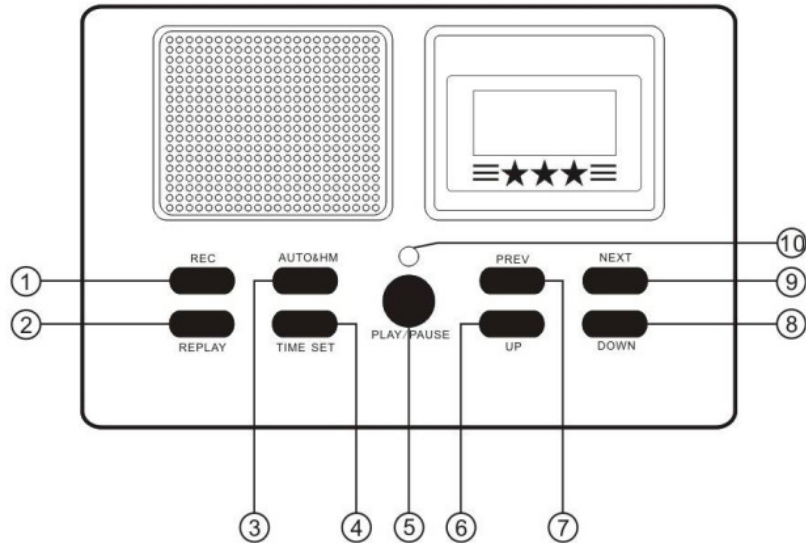


1. **REC** - Use to record incoming and outgoing calls when in manual mode
2. **REPLAY** - Use to select audio calls that have been recorded for playback.
3. **AUT/HM** – Use to select Automatic or Manual recording.
4. **TIME SET** – Use to set year/month/date/time
5. **PLAY/PAUSE**: When setting the time/date – Use this button to set the date/time selected . When in playback mode use this to play or pause a

recording.

6. **UP** – Press to increase volume when you are in playback mode.
7. **PREV** – Press to listen to previous message in playback mode
8. **DOWN**: Press to decrease volume when you are in playback mode.
9. **NEXT** – Press to listen to the next recording when you are in playback mode.
10. **LED** – When recording the light is green. When not recording light is red.

Back Panel graphic

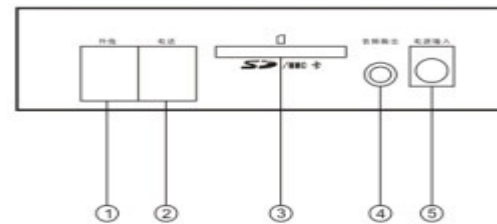

1. **LINE** – This is the port where the phone line goes.
2. **TEL** – This is the port where the telephone wire goes.
3. **SD CARD** – Slot for the SD Card
4. **Audio output** (Use this to add speakers to listen to recorded calls)
5. **DC INPUT** – Power plug


Display Functions

1. Display Interface



Image on the left is used when the recorder is in recording mode. Select image on the right to view/select/playback recorded files. Selection is made with “prev/next” buttons.

2. Recording Interface(Recording Mode)




- Is recording || Is paused ■ Is stopped

00 : 00 : 08 Is the current recording time when recording.

18-18-18.WAV Time of recording (18 hour 18 minute 18 seconds),

This will be the filename that is saved on the SDCARD.

3. Playback Interface(Playback Mode)



▶ is playing back recording , || playback is paused ,

- playback stopped

00 : 00 : 08 is the play time


00 : 08 : 00 is the recording time

18-18-18.WAV Time of recording (18 hour 18 minute 18 seconds),

This will be the filename that is saved on the SDCARD.

How To Operate

Once wires are plugged in, insert the SD card into the unit and wait one minute for the SD card to initiate or load. When this is

displayed  on the LCD screen, then your recorder is ready to operate.

Selecting Auto or Manual recording.

Select the Mode you would like to use:
By pressing the “auto&hm” button.


Press the “auto&hm” button and the first option will be:
Manual Mode:(Used to manually record “ONLY” when rec button is pushed during call)

Press the “auto&hm” button and the second option will be:
Auto Mode:(Used to automatically record all incoming and outgoing calls automatically)

When LCD displays this picture it means Stealthphone II is in standby mode.




1. If the Stealthphone II is in “Automatic mode”.It will begin recording as soon as the telephone is answered. The display will look like the figure below.




2. REPLAY function : To replay the recording press the “replay button” then choose the date you want to listen to by using the “PREV or



(in this case April 13th 2009)

3.  .Then choose the time of the call and press”PLAY/PAUSE” to play.

(In this case 12:12am and 30seconds.

4.  When you are in “playback mode” the display will be like this.

5. **Volume Control:** In “playback mode” press ”UP” or “down” to control volume.

6. **Clock setting :**Press (AND HOLD)”TIME SET”to set the clock:

- First select year, Second select month, Third Select day.
- Fourth select hour, Fifth select minutes, Last select seconds:

Very Important “Select “Play/Pause” to save your desired settings.